

## AC "Z" SERIES XLR METAL CHASSIS MOUNT CONNECTORS

The metal chassis mount "Z" series connectors are designed for the audio user where durability, reliability and strength across a wide range of applications are important. All AC products are manufactured to the highest quality standards and will withstand the harshest environments. This range complies with IEC268-12 and AES 14-1992 standards. CSA File Number 68598

**Note:** A ground tag is standard on all AC "Z" series connectors. Although the ground tag is intended for RFI shielding applications, Amphenol cannot guarantee its effectiveness in all cases.

The non-conductive Black polyester finish insulates the ground tag from the shell and should not be used in applications requiring ground contact to the shell.

### Features

- The "D" size housing can be either front or rear mounted using the same panel cutout.
- The "P" size housing is the original wide flange front mounting XLR connector. "PN" is the original narrow flange front mounting male connector.
- A leading first mate last break socket contact is standard on all female connectors (Pin 1).
- Solder cup or Vertical PCB versions.
- Connectors are fitted with a grounding system for RFI shielding applications.
- Available in 3, 4, 5, 6A and 7 contact arrangements.
- Compatible with all other XLR brands.

### Options

- Solder Bucket termination
- Vertical PCB contacts
- Zinc Diecast Shell - Satin Nickel Finish
- Zinc Diecast Shell - Black Polyester Finish
- Gold, Silver or Tin Plated Contacts
- Bulk Packaging
- Single Bag packs
- Precision machined contacts
- Cost effective stamped contacts on 3 pole
- Latchless versions (Non-Latching) (Female only)

### Ordering Codes

We have listed the more common ordering codes in each section. For further options please refer to the part number breakdown charts. Please contact us if you need any further assistance.

### Simple steps to guide you in using this catalogue

- 1) Identify the product group listed in Contents on Page 1 and go directly to that page number.
- 2) Each product group cover page then details information and options available.
- 3) Refer to the product detail pages and identify the product you require pictorially.
- 4) Read the product description column for the products standard features.
- 5) Use variations column to determine your choice.
- 6) Identify part number.
- 7) In the event the particular option you require is not listed please refer to the part number breakdown page at the end of each section.
- 8) Please contact us directly if you have any further problems.



**Features:**

- Zinc Diecast Shell.
- D size housing can be front or rear mounted using the same panel cutout.
- Solder Bucket connections.
- Vertical PCB mounting (not available in 4 contact female).
- Precision machined or Stamped contacts (3 pin only).
- Leading first mate last break socket contact.
- Positive latch lock system.

**Options:** Stamped contacts (3 contact only), Gold plated contacts, Vertical PCB contacts, Black finish, Non-Latching(Female only),Bulk Pack.

**Part Number Breakdown:** Page 24

**Specifications:** Page 25

**PCB Footprints:** Page 26

**Panel Cutouts:** Page 26

PRODUCT - FIGURE	DRAWING	Dimensions in mm (inches)	DESCRIPTION	VARIATIONS	PART NUMBER
		<p>XLR 3 pole male, D Flange, Machined contacts, Nickel Finish</p>	Standard	AC3MMDZ	
			Gold Plated Contacts	AC3MMDZ-AU	
		<p>XLR 3 pole male, D Flange, Machined contacts, Black Finish</p>	Vertical PCB	AC3MMDZV	
			Bulk Pack	AC3MMDZ BULK	
			Standard	AC3MMDZB	
			Gold Plated Contacts	AC3MMDZB-AU	
		<p>XLR 3 pole male, D Flange, Stamped contacts, Nickel Finish</p>	Vertical PCB	AC3MMDZVB	
			Bulk Pack	AC3MMDZB BULK	
			Standard	AC3MMDZBZ	
		<p>XLR 3 pole male, D Flange, Stamped contacts, Black Finish</p>	Gold Plated Contacts	AC3MMDZBZ-AU	
			Vertical PCB	AC3MMDZVB	
			Bulk Pack	AC3MMDZB BULK	
			Standard	AC3MMDZBZ	
		<p>XLR 3 pole female, D Flange, Stamped contacts, Nickel Finish</p>	Gold Plated Contacts	AC3MMDZBZ-AU	
			Vertical PCB	AC3MMDZVB	
			Bulk Pack	AC3MMDZB BULK	
		<p>XLR 3 pole female, D Flange, Stamped contacts, Black Finish</p>	Standard	AC3MMDZBZ	
			Gold Plated Contacts	AC3MMDZBZ-AU	
			Vertical PCB	AC3MMDZVB	
			Bulk Pack	AC3MMDZB BULK	



PRODUCT - FIGURE	DRAWING	DESCRIPTION	VARIATIONS	PART NUMBER
		XLR 4 pole male, D Flange, Machined contacts, Nickel Finish	Standard	AC4MDZ
			Gold Plated Contacts	AC4MDZ-AU
		XLR 4 pole male, D Flange, Machined contacts, Black Finish	Vertical PCB	AC4MDZV
			Bulk Pack	AC4MDZ BULK
		XLR 4 pole female, D Flange, Stamped contacts, Nickel Finish	Standard	AC4MDZB
			Gold Plated Contacts	AC4MDZB-AU
		XLR 4 pole female, D Flange, Stamped contacts, Black Finish	Vertical PCB	AC4MDZVB
			Bulk Pack	AC4MDZB BULK
		XLR 4 pole female, D Flange, Stamped contacts, Nickel Finish	Gold Plated Contacts	AC4FDZ
			Vertical PCB	AC4FDZV
		XLR 4 pole female, D Flange, Stamped contacts, Black Finish	Bulk Pack	AC4FDZ BULK
			Standard	AC4FDZB
		XLR 4 pole female, D Flange, Stamped contacts, Black Finish	Gold Plated Contacts	AC4FDZB-AU
			Vertical PCB	AC4FDZVB
		XLR 4 pole female, D Flange, Stamped contacts, Black Finish	Bulk Pack	AC4FDZB BULK
			Standard	AC4FDZB
		XLR 5 pole male, D Flange, Machined contacts, Nickel Finish	Gold Plated Contacts	AC5MDZ
			Vertical PCB	AC5MDZV
		XLR 5 pole male, D Flange, Machined contacts, Black Finish	Bulk Pack	AC5MDZ BULK
			Standard	AC5MDZB
		XLR 5 pole male, D Flange, Machined contacts, Black Finish	Gold Plated Contacts	AC5MDZB-AU
			Vertical PCB	AC5MDZVB
		XLR 5 pole male, D Flange, Machined contacts, Black Finish	Bulk Pack	AC5MDZB BULK
			Standard	AC5MDZB
		XLR 5 pole female, D Flange, Machined contacts, Nickel Finish	Gold Plated Contacts	AC5FDZ
			Vertical PCB	AC5FDZV
		XLR 5 pole female, D Flange, Machined contacts, Black Finish	Bulk Pack	AC5FDZ BULK
			Standard	AC5FDZB
		XLR 5 pole female, D Flange, Machined contacts, Black Finish	Gold Plated Contacts	AC5FDZB-AU
			Vertical PCB	AC5FDZVB
		XLR 5 pole female, D Flange, Machined contacts, Black Finish	Bulk Pack	AC5FDZB BULK

PRODUCT - FIGURE	DRAWING Dimensions in mm (inches)	DESCRIPTION	VARIATIONS	PART NUMBER
		XLR 6A pole male, D Flange, Machined contacts, Nickel Finish	Standard	AC6AMDZ
			Gold Plated Contacts	AC6AMDZ-AU
			Vertical PCB	AC6AMDZV
			Bulk Pack	AC6AMDZ BULK
		XLR 6A pole male, D Flange, Machined contacts, Black Finish	Standard	AC6AMDZB
			Gold Plated Contacts	AC6AMDZB-AU
			Vertical PCB	AC6AMDZVB
			Bulk Pack	AC6AMDZB BULK
		XLR 6A pole female, D Flange, Machined contacts, Nickel Finish	Standard	AC6AFDZ
			Gold Plated Contacts	AC6AFDZ-AU
			Vertical PCB	AC6AFDZV
			Bulk Pack	AC6AFDZ BULK
		XLR 6A pole female, D Flange, Machined contacts, Black Finish	Standard	AC6AFDZB
			Gold Plated Contacts	AC6AFDZB-AU
			Vertical PCB	AC6AFDZVB
			Bulk Pack	AC6AFDZB BULK
		XLR 7 pole male, D Flange, Gold Plated Machined contacts, Nickel Finish	Standard	AC7MDZ
			Vertical PCB	AC7MDZV
			Bulk Pack	AC7MDZ BULK
		XLR 7 pole male, D Flange, Gold Plated Machined contacts, Black Finish	Standard	AC7MDZB
			Vertical PCB	AC7MDZVB
			Bulk Pack	AC7MDZB BULK
		XLR 7 pole female, D Flange, Gold Plated Machined contacts, Nickel Finish	Standard	AC7FDZ
			Vertical PCB	AC7FDZV
			Bulk Pack	AC7FDZ BULK
		XLR 7 pole female, D Flange, Gold Plated Machined contacts, Black Finish	Standard	AC7FDZB
			Vertical PCB	AC7FDZVB
			Bulk Pack	AC7FDZB BULK





**Features:**

- Zinc Diecast shell.
- The P size housing is the original wide flange front mounting XLR connector. PN is the original narrow, front mounting male connector.
- Solder Bucket connections.
- Vertical PCB mounting.
- Precision Machined or Stamped contacts (3 pin only).
- Leading first mate last break socket contact.
- Positive latch lock system.

**Options:** Stamped contacts (3 contact only), Gold plated contacts, Vertical PCB contacts, Black Finish, Non-Latching (Female only), Bulk Pack.

**Part Number Breakdown:** Page 24


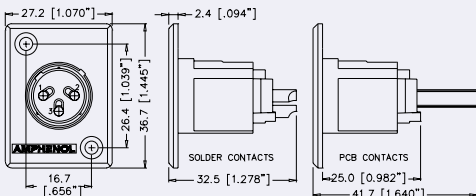














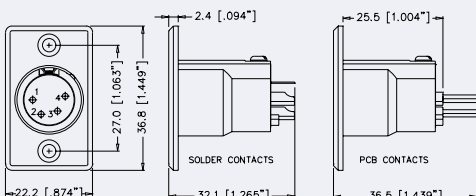



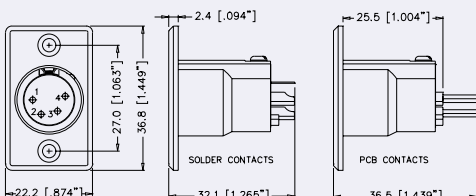




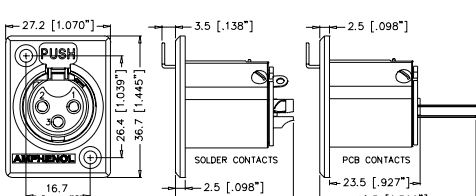

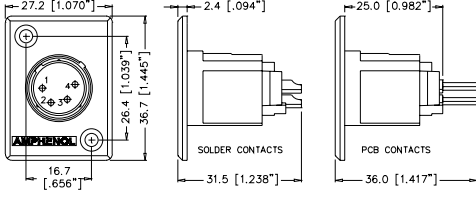


**Specifications:** Page 25







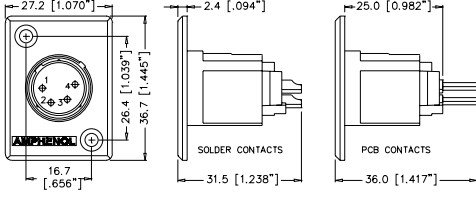

**PCB Footprints:** Page 26

**Panel Cutouts:** Page 26



PRODUCT - FIGURE	DRAWING	DESCRIPTION	VARIATIONS	PART NUMBER
	<p>Dimensions in mm (inches)</p> <p>2.4 [.094"]</p> <p>25.5 [1.004"]</p> <p>27.0 [1.063"]</p> <p>36.8 [1.449"]</p> <p>22.2 [.874"]</p> <p>32.1 [1.265"]</p> <p>36.5 [1.437"]</p> <p>SOLDER CONTACTS</p> <p>PCB CONTACTS</p>	XLR 3 pole male, Narrow flange, Machined contacts, Nickel Finish	Standard	AC3MMPNZ
			Gold Plated Contacts	AC3MMPNZ-AU
	<p>Dimensions in mm (inches)</p> <p>2.4 [.094"]</p> <p>25.5 [1.004"]</p> <p>27.0 [1.063"]</p> <p>36.8 [1.449"]</p> <p>22.2 [.874"]</p> <p>32.1 [1.265"]</p> <p>36.5 [1.437"]</p> <p>SOLDER CONTACTS</p> <p>PCB CONTACTS</p>	XLR 3 pole male, Narrow flange, Machined contacts, Black Finish	Standard	AC3MMPNZB
			Gold Plated Contacts	AC3MMPNZB-AU
	<p>Dimensions in mm (inches)</p> <p>2.4 [.094"]</p> <p>25.5 [1.004"]</p> <p>27.0 [1.063"]</p> <p>36.8 [1.449"]</p> <p>22.2 [.874"]</p> <p>32.1 [1.265"]</p> <p>36.5 [1.437"]</p> <p>SOLDER CONTACTS</p> <p>PCB CONTACTS</p>	XLR 3 pole male, Narrow flange, Stamped contacts, Nickel Finish	Standard	AC3MPNZ
			Gold Plated Contacts	AC3MPNZ-AU
	<p>Dimensions in mm (inches)</p> <p>2.4 [.094"]</p> <p>25.5 [1.004"]</p> <p>27.0 [1.063"]</p> <p>36.8 [1.449"]</p> <p>22.2 [.874"]</p> <p>32.1 [1.265"]</p> <p>36.5 [1.437"]</p> <p>SOLDER CONTACTS</p> <p>PCB CONTACTS</p>	XLR 3 pole male, Narrow flange, Stamped contacts, Black Finish	Standard	AC3MPNZB
			Gold Plated Contacts	AC3MPNZB-AU
	<p>Dimensions in mm (inches)</p> <p>2.4 [.094"]</p> <p>25.0 [0.982"]</p> <p>27.2 [1.070"]</p> <p>26.4 [1.039"]</p> <p>36.7 [1.445"]</p> <p>16.7 [.656"]</p> <p>31.5 [1.238"]</p> <p>36.0 [1.415"]</p> <p>SOLDER CONTACTS</p> <p>PCB CONTACTS</p>	XLR 3 pole male, Wide flange, Machined contacts, Nickel Finish	Standard	AC3MMP
			Gold Plated Contacts	AC3MMP-AU
	<p>Dimensions in mm (inches)</p> <p>2.4 [.094"]</p> <p>25.0 [0.982"]</p> <p>27.2 [1.070"]</p> <p>26.4 [1.039"]</p> <p>36.7 [1.445"]</p> <p>16.7 [.656"]</p> <p>31.5 [1.238"]</p> <p>36.0 [1.415"]</p> <p>SOLDER CONTACTS</p> <p>PCB CONTACTS</p>	XLR 3 pole male, Wide flange, Machined contacts, Black Finish	Standard	AC3MMPB
			Gold Plated Contacts	AC3MMPB-AU
	<p>Dimensions in mm (inches)</p> <p>2.4 [.094"]</p> <p>25.0 [0.982"]</p> <p>27.2 [1.070"]</p> <p>26.4 [1.039"]</p> <p>36.7 [1.445"]</p> <p>16.7 [.656"]</p> <p>31.5 [1.238"]</p> <p>36.0 [1.415"]</p> <p>SOLDER CONTACTS</p> <p>PCB CONTACTS</p>	XLR 3 pole male, Wide flange, Vertical PCB contacts, Black Finish	Vertical PCB	AC3MMPVB
			Bulk Pack	AC3MMPB BULK

PRODUCT - FIGURE	DRAWING	DESCRIPTION	VARIATIONS	PART NUMBER
		XLR 3 pole male, Wide flange, Stamped contacts, Nickel Finish	Standard	AC3MP
			Gold Plated Contacts	AC3MP-AU
			Vertical PCB	AC3MPV
			Bulk Pack	AC3MP BULK
		XLR 3 pole male, Wide flange, Stamped contacts, Black Finish	Standard	AC3MPB
			Gold Plated Contacts	AC3MPB-AU
			Vertical PCB	AC3MPVB
			Bulk Pack	AC3MPB BULK
		XLR 3 pole female, Wide flange, Stamped contacts, Nickel Finish	Standard	AC3FPZ
			Gold Plated Contacts	AC3FPZ-AU
			Vertical PCB	AC3FPZV
			Bulk Pack	AC3FPZ BULK
		XLR 3 pole female, Wide flange, Stamped contacts, Black Finish	Standard	AC3FPZB
			Gold Plated Contacts	AC3FPZB-AU
			Vertical PCB	AC3FPZVB
			Bulk Pack	AC3FPZB BULK
		XLR 4 pole male, Narrow flange, Machined contacts, Nickel Finish	Standard	AC4MPNZ
			Gold Plated Contacts	AC4MPNZ-AU
			Vertical PCB	AC4MPNZV
			Bulk Pack	AC4MPNZ BULK
		XLR 4 pole male, Narrow flange, Machined contacts, Black Finish	Standard	AC4MPNZB
			Gold Plated Contacts	AC4MPNZB-AU
			Vertical PCB	AC4MPNZVB
			Bulk Pack	AC4MPNZB BULK
		XLR 4 pole male, Wide flange, Machined contacts, Nickel Finish	Standard	AC4MP
			Gold Plated Contacts	AC4MP-AU
			Vertical PCB	AC4MPV
			Bulk Pack	AC4MP BULK
		XLR 4 pole male, Wide flange, Machined contacts, Black Finish	Standard	AC4MPB
			Gold Plated Contacts	AC4MPB-AU
			Vertical PCB	AC4MPVB
			Bulk Pack	AC4MPB BULK





PRODUCT - FIGURE	DRAWING	DESCRIPTION	VARIATIONS	PART NUMBER
		XLR 4 pole female, Wide flange, Stamped contacts, Nickel Finish	Standard	AC4FPZ
			Gold Plated Contacts	AC4FPZ- AU
			Vertical PCB	AC4FPZV
			Bulk Pack	AC4FPZ BULK
		XLR 4 pole female, Wide flange, Stamped contacts, Black Finish	Standard	AC4FPZB
			Gold Plated Contacts	AC4FPZB- AU
			Vertical PCB	AC4FPZVB
			Bulk Pack	AC4FPZB BULK
		XLR 5 pole male, Narrow flange, Machined contacts, Nickel Finish	Standard	AC5MPNZ
			Gold Plated Contacts	AC5MPNZ- AU
			Vertical PCB	AC5MPNZV
			Bulk Pack	AC5MPNZ BULK
		XLR 5 pole male, Narrow flange, Machined contacts, Black Finish	Standard	AC5MPNZB
			Gold Plated Contacts	AC5MPNZB- AU
			Vertical PCB	AC5MPNZVB
			Bulk Pack	AC5MPNZB BULK
		XLR 5 pole male, Wide flange, Machined contacts, Nickel Finish	Standard	AC5MP
			Gold Plated Contacts	AC5MP- AU
			Vertical PCB	AC5MPV
			Bulk Pack	AC5MP BULK
		XLR 5 pole male, Wide flange, Machined contacts, Black Finish	Standard	AC5MPB
			Gold Plated Contacts	AC5MPB- AU
			Vertical PCB	AC5MPVB
			Bulk Pack	AC5MPB BULK
		XLR 5 pole female, Wide flange, Machined contacts, Nickel Finish	Standard	AC5FPZ
			Gold Plated Contacts	AC5FPZ- AU
			Vertical PCB	AC5FPZV
			Bulk Pack	AC5FPZ BULK
		XLR 5 pole female, Wide flange, Machined contacts, Black Finish	Standard	AC5FPZB
			Gold Plated Contacts	AC5FPZB- AU
			Vertical PCB	AC5FPZVB
			Bulk Pack	AC5FPZB BULK



PRODUCT - FIGURE	DRAWING	DESCRIPTION	VARIATIONS	PART NUMBER
	<p>Dimensions in mm (inches)</p>	XLR 6A pole male, Narrow flange, Machined contacts, Nickel Finish	Standard	AC6AMPNZ
			Gold Plated Contacts	AC6AMPNZ- AU
			Vertical PCB	AC6AMPNZV
			Bulk Pack	AC6AMPNZ BULK
	<p>SOLDER CONTACTS PCB CONTACTS</p>	XLR 6A pole male, Narrow flange, Machined contacts, Black Finish	Standard	AC6AMPNZB
			Gold Plated Contacts	AC6AMPNZB- AU
			Vertical PCB	AC6AMPNZVB
			Bulk Pack	AC6AMPNZB BULK
	<p>SOLDER CONTACTS PCB CONTACTS</p>	XLR 6A pole male, Wide flange, Machined contacts, Nickel Finish	Standard	AC6AMP
			Gold Plated Contacts	AC6AMP- AU
			Vertical PCB	AC6AMPV
			Bulk Pack	AC6AMP BULK
	<p>SOLDER CONTACTS PCB CONTACTS</p>	XLR 6A pole male, Wide flange, Machined contacts, Black Finish	Standard	AC6AMPB
			Gold Plated Contacts	AC6AMPB- AU
			Vertical PCB	AC6AMPVB
			Bulk Pack	AC6AMPB BULK
	<p>SOLDER CONTACTS PCB CONTACTS</p>	XLR 6A pole female, Wide flange, Machined contacts, Nickel Finish	Standard	AC6AFPZ
			Gold Plated Contacts	AC6AFPZ- AU
			Vertical PCB	AC6AFPZV
			Bulk Pack	AC6AFPZ BULK
	<p>SOLDER CONTACTS PCB CONTACTS</p>	XLR 6A pole female, Wide flange, Machined contacts, Black Finish,	Standard	AC6AFPZB
			Gold Plated Contacts	AC6AFPZB- AU
			Vertical PCB	AC6AFPZVB
			Bulk Pack	AC6AFPZB BULK
	<p>SOLDER CONTACTS PCB CONTACTS</p>	XLR 7 pole male, Narrow flange, Gold Plated Machined contacts, Nickel Finish	Standard	AC7MPNZ
			Vertical PCB	AC7MPNZV
			Bulk Pack	AC7MPNZ BULK
				<p>SOLDER CONTACTS PCB CONTACTS</p>
Vertical PCB	AC7MPNZVB			
Bulk Pack	AC7MPNZB BULK			





PRODUCT - FIGURE	DRAWING Dimensions in mm (inches)	DESCRIPTION	VARIATIONS	PART NUMBER
		XLR 7 pole male, Wide flange, Gold Plated Machined contacts, Nickel Finish	Standard	AC7MP
			Vertical PCB	AC7MPV
			Bulk Pack	AC7MP BULK
		XLR 7 pole male, Wide flange, Gold Plated Machined contacts, Black Finish	Standard	AC7MPB
			Vertical PCB	AC7MPBV
			Bulk Pack	AC7MPB BULK
		XLR 7 pole female, Wide flange, Gold Plated Machined contacts, Nickel Finish	Standard	AC7FPZ
			Vertical PCB	AC7FPZV
			Bulk Pack	AC7FPZ BULK
		XLR 7 pole female, Wide flange, Gold Plated Machined contacts, Black Finish	Standard	AC7FPZB
			Vertical PCB	AC7FPZVB
			Bulk Pack	AC7FPZB BULK



## PART NUMBER BREAKDOWN

### METAL TYPE FLANGE

E. G. **AC3MMPNZVB-AU BULK**  
**AC** (Series Prefix), **3** contacts, **Male**, **Machined** Contacts, **PN** (Narrow Flange),  
**Z** (Metal Chassis Series), **V**ertical Printed Circuit Board, **B**lack Polyester Finish,  
**- AU** (Gold Plated Contacts), **Bulk** Packaged.






SERIES PREFIX  
 CONTACT LAYOUTS  
 GENDER  
 CONTACT TYPE  
 SHELL STYLE  
 SHELL SERIES  
 TERMINATION  
 SHELL FINISH  
 CONTACT PLATING  
 PACKAGING

AC 3 M M PN Z V B - AU BULK

<b>SERIES PREFIX</b>	AC	=	Series Prefix
<b>CONTACT LAYOUTS</b>	3	=	3 Contacts
	4	=	4 Contacts
	5	=	5 Contacts
	6A	=	6 Contacts
	7	=	7 Contacts
<b>GENDER</b>	F	=	Female Socket Contacts
	M	=	Male Pin Contacts
<b>MACHINED CONTACTS</b>	Blank	=	Stamped Contacts
	M	=	Machined Contacts (Applicable 3 male pin contacts only)
NOTE: 4 - 7 contact connectors have machined contacts as standard. They are not available in stamped contacts.			
<b>SHELL STYLE</b>	D	=	Small Flange(front or rear mounting)
	P	=	Large Shell with wide flange
	PN	=	Large Shell with Narrow Flange (male only)
<b>SHELL SERIES</b>	Blank	=	Male P Shell Style only
	Z	=	Metal Chassis Series
<b>TERMINATION</b>	Blank	=	Solder Buckets
	V	=	Vertical Printed Circuit Board
<b>SHELL FINISH</b>	Blank	=	Nickel Plated Finish
	B	=	Black Polyester Finish
<b>CONTACT PLATING</b>	Blank	=	Standard Plating ( Silver or Tin - Refer to Standard Data.)
	AU	=	Gold Plated
NOTE: 7 Contact is gold plated as standard.			
<b>PACKAGING</b>	Blank	=	Individual Bags
	BULK	=	Bulk Packed

**Note:** Non-Latching Versions (Female) available - Please contact us for part number options.

## STANDARD DATA AC SERIES CHASSIS - METAL "Z"

		VALUE				
<b>GENERAL CHARACTERISTICS</b>	Number of contacts	3	4	5	6A	7
	Contact Arrangement (Front view of pin inserts)					
	Termination	Solder Bucket / Printed Circuit Board (PCB)				
	Max. Wire Gauge - Stranded wire: Solder Printed Circuit Board - PCB	14AWG N/A	16AWG N/A	18AWG N/A	18AWG N/A	20AWG N/A
Flammability rating of plastics	UL94V-0					
<b>ELECTRICAL CHARACTERISTICS</b>	Service Voltage RMS	133V <sup>1)</sup>				
	Test Voltage AC RMS	1400V				
	Current carrying capacity: Solder Printed Circuit Board (PCB)	15A 15A	10A 10A	7.5A 7.5A	7.5A 7.5A	5A 5A
	Typical Contact Resistance	≤ 3mΩ				
	Insulation Resistance	≥ 1000MΩ				
<b>CLIMATIC CHARACTERISTICS</b>	Protection Class	IP40				
	Operating Temperature	-25°C to +75°C (-13°F to +167°F)				
<b>MECHANICAL CHARACTERISTICS</b>	Weight - Metal <sup>2)</sup>	31g (0.068lb)	32g (0.070lb)	33g (0.072lb)	33g (0.072lb)	33g (0.072lb)
	Mechanical Operations	1000 mating cycles				
<b>MATERIALS</b>	Connector Shell	Diecast Zinc Alloy				
	Shell Finish	Satin Nickel or Black Polyester				
	Insulators	UL94V-0 PBT Resin or Modified PPE Resin				
	Male Contact					
	Stamped Solder and PCB-(Material/Plating)	Phosphor Bronze / Silver or Gold (optional)				
	Machined Solder-(Material/Plating)	Brass / Silver or Gold (optional)				
Female Contact	Stamped Solder and PCB-(Material/Plating)	Phosphor Bronze / Tin or Gold (optional)				
	Machined Solder-(Material/Plating)	Brass / Silver or Gold (Optional) - 4 socket is tin plated				

Rev 1 - 08/2003


<sup>1)</sup> Not suitable for domestic applications above 50V

<sup>2)</sup> Approximate weight only, does not include packaging. Please contact us for exact weight for shipping purposes.

## AC SERIES CHASSIS METAL "Z"


### PCB FOOTPRINTS STRAIGHT (V)

#### CONNECTOR SIDE OF PCB




Ø01.2mm(.05") + Panel cutout CL

AC3F\*ZV




Ø01.2mm(.05") + Panel cutout CL

AC3M\*ZV




Ø01.2mm(.05") + Panel cutout CL

AC3MM\*ZV




Ø01.2mm(.05") + Panel cutout CL

AC4F\*ZV




Ø01.2mm(.05") + Panel cutout CL

AC4M\*ZV




Ø01.2mm(.05") + Panel cutout CL

AC5F\*ZV




Ø01.2mm(.05") + Panel cutout CL

AC5M\*ZV




Ø01.2mm(.05") + Panel cutout CL

AC6AF\*ZV




Ø01.2mm(.05") + Panel cutout CL

AC6AM\*ZV



Ø01.2mm(.05") + Panel cutout CL

AC7F\*ZV




Ø01.2mm(.05") + Panel cutout CL


AC7M\*ZV

### PANEL CUTOUT DIMENSIONS


#### FRONT VIEW




AC\*FDZ




AC\*MDZ




AC\*FPZ




AC\*MP



AC\*MPNZ



AC-PDN-31-XXX



AC-PDN-34-XXX