



Descriptions

T-319 is remote paging console with mixer T2S01, whose communication distance up to 1kms. The paging console could be power supplied by the mixer within 50 meters, while extra DC 24V power supply is needed when distance is longer than 50 meters. This mic inputs with highest priority over all other inputs.


Features

- * Highest input priority
- * Condenser microphone type
- * Talk and chime trigger functional buttons
- * 10 segment LED amplifier output level meters
- * Mic volume is provided
- * Extra DC power supply is needed when communication distance is more than 50 meters

Specifications

Model	T-319
Output Level/Impedance	0dB(unit gain)/600Ω balanced
MIC Input Sensitivity/Impedance	-50dB/600Ω balanced
Frequency Response	50Hz~18KHz(-3dB)
THD	Less than 0.1%
S/N Ratio	Better than 65dB
MIC	
Type	Condenser Microphone
Polar Pattern	Unidirectional
Frequency Response	100Hz~16KHz
Impedance	Max 680Ω
Sensitivity	-47dB±3dB
S/N Ratio	More than 60dB
General	
Power Supply	DC 24V
Weight	960g (Without Microphone)
Dimensions	197x115x43.5mm

Rear Panel T-319

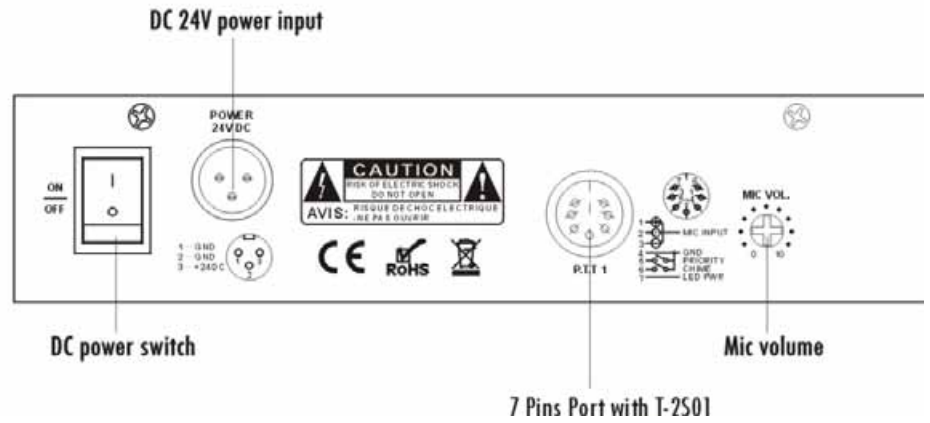

Connections

